

Eltex yarn break sensors EVG-s

EVG-s yarn break sensors are designed for general purpose use. They are robust, with a metal housing. The piezoelectric principle is used to detect the yarn movement. This working principle makes them suitable for all types of yarn and makes them insensitive to dust, dirt and humidity variations.

Each sensor has a double modular connector, so they can easily be connected in parallel.

The sensors can be used with a PLC or many other electronic devices like relays, I/O modules, etc.



■ Function description

The sensing eyelet is made of aluminium oxide ceramic.

The output reflects the movement of the yarn.

At power-on, sensing is automatically on. The sensors can be switched off by the touch button or via a terminal in the connector. When switched off, the sensors will automatically resume sensing when yarn movement is detected continuously for seven seconds.

Two dual colour LEDs indicate the state of the sensor.

The LEDs are red when the sensor is off, steady green when on and yarn movement is detected, and slow flashing green when on but no yarn movement is detected.

The LEDs also show the current sensitivity setting.

The sensitivity setting can be changed with the touch button or via a terminal in the connector.

The sensors are protected against wrong polarity on the power supply.



■ Technical specification

Housing in zinc metal

Power supply 17–30 V DC smoothed ripple.
NB! The negative supply must be connected to earth ground to provide proper shielding.

Current consumption Max. 15 mA

Output function Optocoupler output:
The optocoupler is open (off) when the sensor is on and the yarn is moving and also when the sensor is off.

The optocoupler is closed (on) when the sensor is on and the yarn is not moving.

Max. load on output 50 mA

Reaction time 120 ms


Sensors connected together Not more than 70 sensors should be connected in one chain.
For larger applications the Eltex EYE System is recommended.

For more technical information see instruction leaflet TH-0331.

■ Models

Item No	Eyelet	Notes
16520	Closed Ø 6,5 mm	
16521	Open	
16522	Closed Ø 9 mm	
16523	Quick thread	
16530	Closed Ø 6,5 mm	Air noise filtered
16531	Open	Air noise filtered
16532	Closed Ø 9 mm	Air noise filtered
16533	Quick thread	Air noise filtered

■ Dimensions

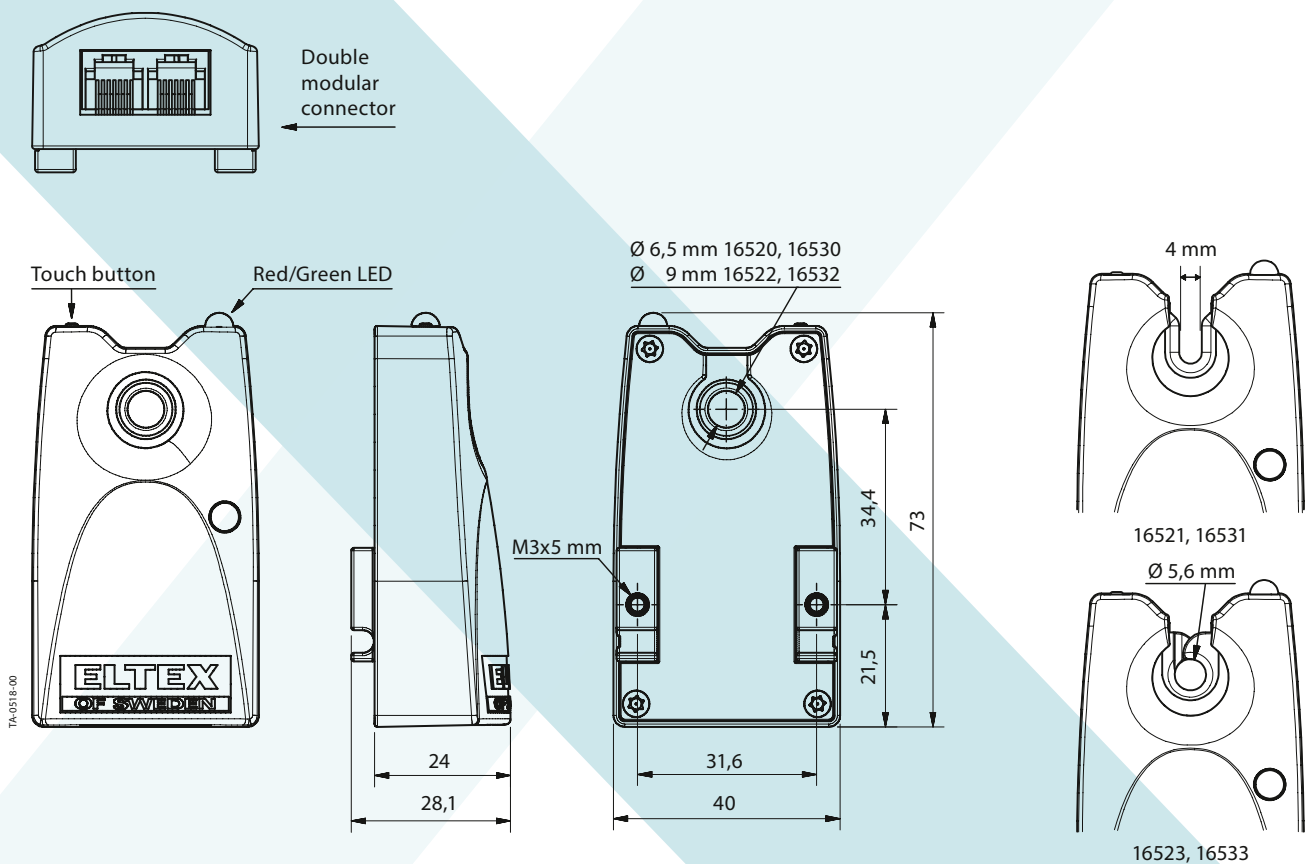

ELTEX
OF SWEDEN

Box 24, SE-283 21 OSBY, Sweden | Tel: +46 479 536300 | Fax: +46 479 536399 | Email: info@eltex.se | www.eltex.se

Eltex U.S., Inc.
13031 E. Wade Hampton Blvd.,
GREER, South Carolina, 29651, USA
Tel: +1 864-879-2131
Fax: +1 864-879-3734
Email: sales@eltexus.com

Eltex Manufacturing Ltd.
Railway Road,
TEMPLEMORE, Co. Tipperary, Ireland
Tel: +353 504-314 33
Fax: +353 504-310 02
Email: info@eltex.ie

POLSA-ELTEX, S.L.
Zamora, 103 – entlo 3o,
ES-08018 BARCELONA, Spain
Tel: +34 93 309 00 17
Fax: +34 93 309 59 45
Email: polsa@infonegocio.com

Eltex China. Beijing S&S Electronics Technology Co., Ltd.
B052 F10, SOHO Nexus Center, No.19A,
East 3rd ring north Rd., Beijing, China 10020
Tel: +86 10 57351219
Fax: +86 10 65066468
Email: Chuan.Jiang@eltex.cn Web: www.eltex.cn